

DESCRIZIONE / DESCRIPTION

Rubinetto con portagomma a sfera compatto con foro anti-legionella.

Hose union ball bibcock Compaq type with anti-legionella hole.


FOTO / PICTURE



CARATTERISTICHE / FEATURES

- corpo, sfera, asta e bocchettone in ottone CW617N.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine.
- guarnizione tenuta asta: o-ring in gomma NBR e anello in PTFE.
- leva di comando in acciaio plastificato
- finitura nichelata, filettature gialle
- filettature ISO 228/1
- PN 25: TEMP. : -20°C ÷ 120°C
- *brass CW617N body, ball, stem and nut and tail.*
- *ball ground by diamond-tipped tool, chromium plated.*
- *virgin P.T.F.E. seats.*
- *o-ring stem packing in NBR rubber and PTFE ring.*
- *Steel lever with red plastic coating*
- *Nickel plated finishing with yellow threads*
- *threading to ISO 228/1.*
- *PN 25: TEMP. : -20°C ÷ 120°C*

DIMENSIONI PRINCIPALI / LEADING DIMENSIONS

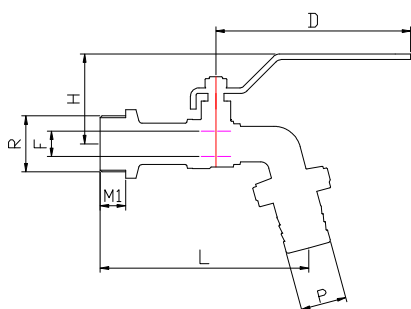

R	1/2	3/4	1"
D	91	91	
H	46.5	47.5	
L	83	93	
M1	9.5	10.5	
F	9	11	
P	15	21	

PRESSIONI DI ESERCIZIO A MAX 80°C / WORKING PREASSURES AT 80°C

PN 25	*	*	p.s.i. 350
	1/2"	3/4"	

PERDITE DI CARICO / PRESSURE DROPS

R"	1/2	3/4
Kv	9	12

$$\Delta P [\text{mm H}_2\text{O}] = 10.000 \times \left[\frac{G [\text{mc/h}]}{Kv} \right]^2$$