

DESCRIZIONE / DESCRIPTION

Valvola a sfera da incasso
con cappuccio e rosone cromati – 2575
con deviatore e rosone cromati – 2585
con maniglia e rosone cromati – 2595
*Built in ball valve
with cover plate and top chromium plated – 2575
with cover plate and lever chromium plated – 2585
with cover plate and handle chromium plated - 2595*

FOTO / PICTURE



2575



2585




2595

CARATTERISTICHE / FEATURES

- corpo, manicotto, e sfera in ottone.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine dimens.con angolo di tenuta di 7° min.
- guarnizione tenuta asta: O-ring gomma NBR
- leva di comando in metallo lucidato e cromato.
- finitura superficiale giallo
- filettature ISO 228/1
- PN 25-TEMP. : -20°C ÷ 120°C
- Brass, cap body, and ball.
- ball ground by diamond-tipped tool, chromium plated.
- virgin P.T.F.E. seats with 7° min. tightness angle.
- O-ring stem packing in NBR rubber.
- Metal handle polished and chromium plated.
- Yellow finishing.
- threading to ISO 228/1.
- PN 25-TEMP. : -20°C ÷ 120°C

DIMENSIONI PRINCIPALI / LEADING DIMENSIONS

R	D	H	D	H	D	H	L	M	C	F
	2575	2575	2585	2585	2595	2595				
1/2"	26	80	69	59	46	55	47.5	11	69	14

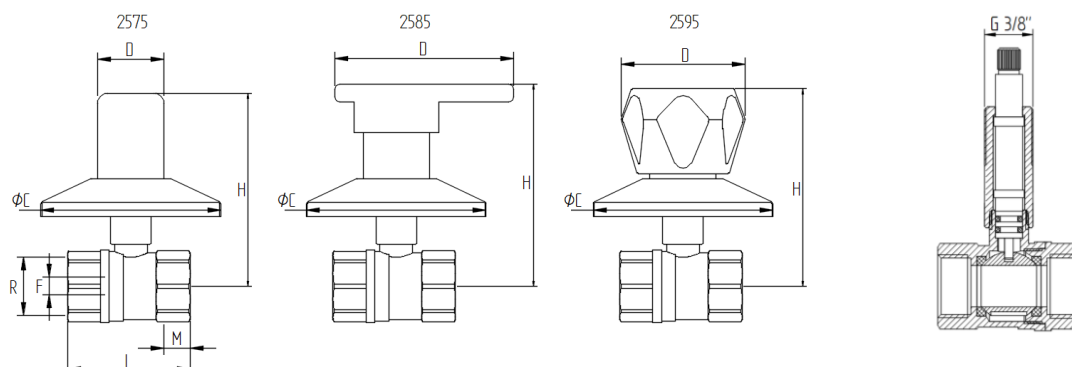

PERDITE DI CARICO / PRESSURE DROPS

R"	1/2
Kv	15

$$\Delta P [\text{mm H}_2\text{O}] = 10.000 \times \left[\frac{G [\text{mc/h}]}{Kv} \right]^2$$