



343TA



343TB



343NN



344TA



344TB



344NN




Valvola ad H termostatzabile a squadra
Angle H valve thermostatic.

Valvola ad H termostatzabile diritta.
Straight H valve thermostatic.

CARATTERISTICHE - FEATURES

- Corpo calotta e codolo ottone CW617N.
- Componenti interni ottone CW614N
- Volantino in ABS.
- guarnizione tenuta O-ring: EPDM
- finitura: cromataTA, biancaTB, nera NN
- filettature ISO 228/1
- PN 10: TEMP. : -20°C ÷ 100°C
- brass CW617N body, tail and nut.
- Brass CW614N internal components.
- ABS cap
- Sealing gasket O-ring: EPDM
- Chrome finishing TA, whiteTB, Black NN
- threading to ISO 228/1.
- PN 10: TEMP. : -20°C ÷ 100°C

DIMENSIONI PRINCIPALI - LEADING DIMENSIONS

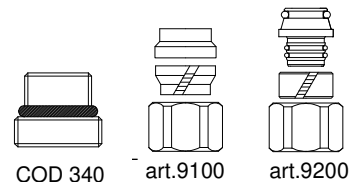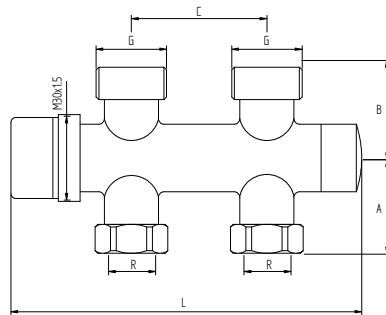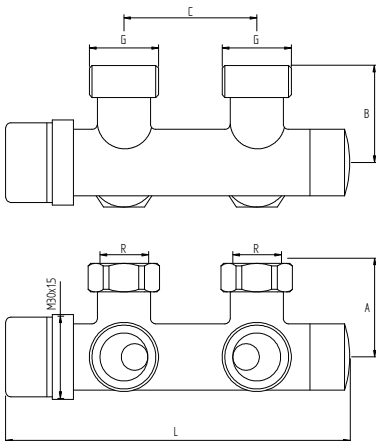

R	C	A	B	L	G
3/4	50	35	28	129	3/4EK

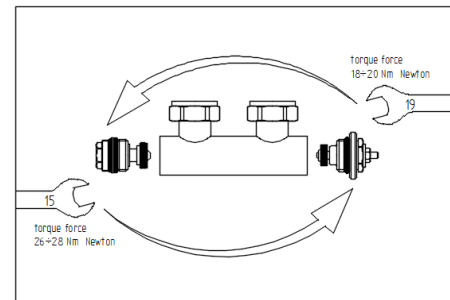
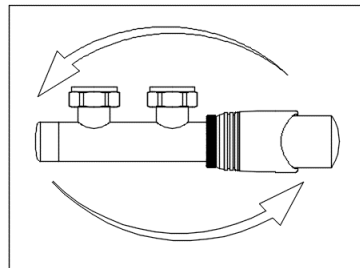
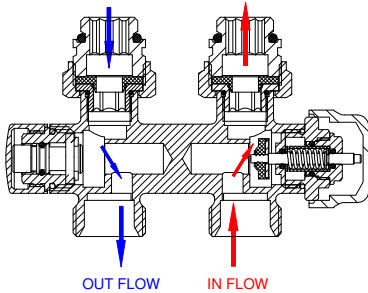
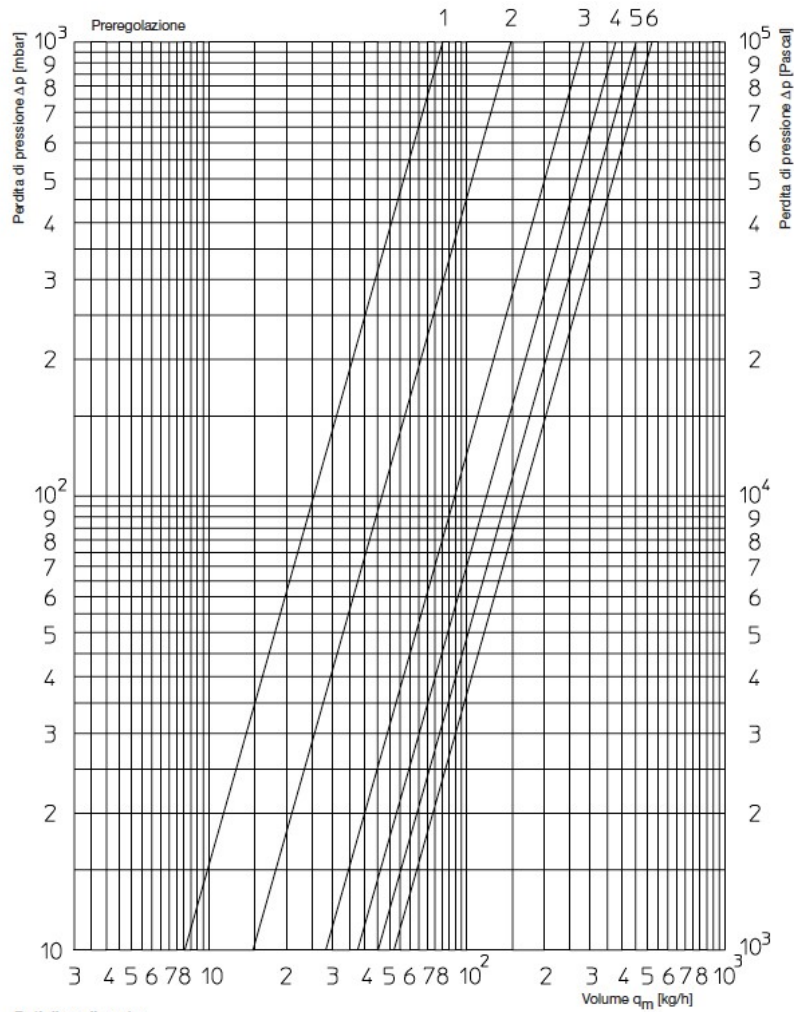


DIAGRAMMA BILANCIAMENTO – BALANCING DIAGRAM

Dati di rendimento:

Preregolazione	1	2	3	4	5	6
Valore kv a 1 K P- scostamento	0,08	0,13	0,20	0,22	0,25	0,28
Valore kv a 1,5 K P- scostamento	0,08	0,15	0,26	0,32	0,37	0,42
Valore kv a 2 K P- scostamento	0,08	0,15	0,28	0,37	0,44	0,52
kvs						0,75