

**DESCRIZIONE / DESCRIPTION**

Rubinetto sfera con portagomma tipo pesante con foro anti-legionella.

*Hose union ball bibcock heavy type with anti-legionella hole.*

**CARATTERISTICHE / FEATURES**


- corpo, sfera, asta e in ottone CW617N.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine.
- guarnizione tenuta asta: O-ring in gomma NBR
- leva di comando in alluminio blu
- Finitura nichelata, filettature gialle
- filettature ISO EN 228/1
- PN 25: TEMP. : -20°C ÷ 120°C

**FOTO / PICTURE**



- brass CW617N body, ball, stem
- ball ground by diamond-tipped tool, chromium plated.
- virgin P.T.F.E. seats.
- O-ring stem packing in NBR rubber.
- Aluminium lever with blue plastic coating
- Nickel plated finishing with yellow threads.
- threading to EN ISO 228/1.
- PN 25: TEMP. : -20°C ÷ 120°C

**DIMENSIONI PRINCIPALI / LEADING DIMENSIONS**

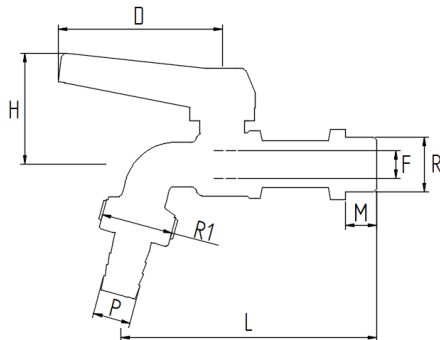

RxR1	1/2x3/4	3/4x1
D	63	63
H	42	45
L	100	113
M	12	14
F	10	13
P	16	20

**PRESSIONI DI ESERCIZIO A MAX 80°C / WORKING PREASSURES AT 80°C**

PN 25	*	*	p.s.i. 350
	1/2"	3/4"	

**PERDITE DI CARICO / PRESSURE DROPS**

R	1/2	3/4
Kv	9	12

$$\Delta P [\text{mm H}_2\text{O}] = 10.000 \times \left[ \frac{G [\text{mc/h}]}{Kv} \right]^2$$