

DESCRIZIONE / DESCRIPTION

Valvola a sfera a passaggio totale F/F anti legionella 008-025 c/premistoppa, leva a T prolungata

Anti-legionella full way ball valve 008-025 F/F with stuffing box with extended T handle

*Vanne à boisseau spérique passage intégral
Anti-legionelles 008-025 F/F a/presse étoupe poignée a T*

CARATTERISTICHE / FEATURES


- corpo, manicotto e sfera in CW617N.
- premistoppa e asta in CW614N.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine.
- guarnizione tenuta asta: anello in PTFE+O-ring.
- leva di comando in Alluminio
- finitura superficiale sabbiata nichelata, filettature gialle.
- filettature ISO 228/1
- PN 30, max. temp. -20° +130°C

FOTO / PICTURE



- *brass CW617N body end connection and ball.*
- *brass CW614N stuffing box and stem.*
- *ball ground by diamond-tipped tool, chromium plated.*
- *virgin P.T.F.E. seats.*
- *stem tightness: PTFE ring+O-ring.*
- *Aluminium T handle*
- *nickel plated finishing with yellow threads.*
- *threading to ISO 228/1.*
- *PN 30, max. temp. -20° + 130°C*

DIMENSIONI PRINCIPALI / LEADING DIMENSIONS

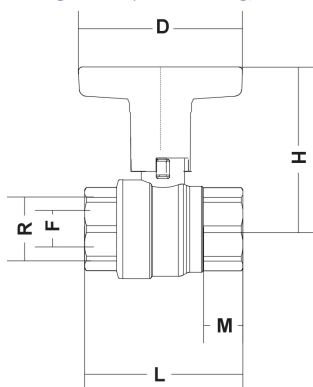

R	3/8	1/2	3/4	1	1 1/4	1 1/2	2
D	60	60	60	82	82	105	105
H	54	57	60	78	88	95	101
L	45	47.5	55	66	80	91	106
M	12	12	12.5	14	16	17	19
F	10	15	20	25	32	40	50


PN 30	*	*	*	*	*	*	*	p.s.i. 435
	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	

PERDITE DI CARICO / PRESSURE DROPS

R"	3/8	1/2	3/4	1	1 1/4	1 1/2	2
Kv	9	15	30	57,5	94	160	265

$$\Delta P [\text{mm H}_2\text{O}] = 10.000 \times \left[\frac{G [\text{mc/h}]}{Kv} \right]^2$$

**Diagramma Pressione-Temperatura
Pressure - Temperature diagram**

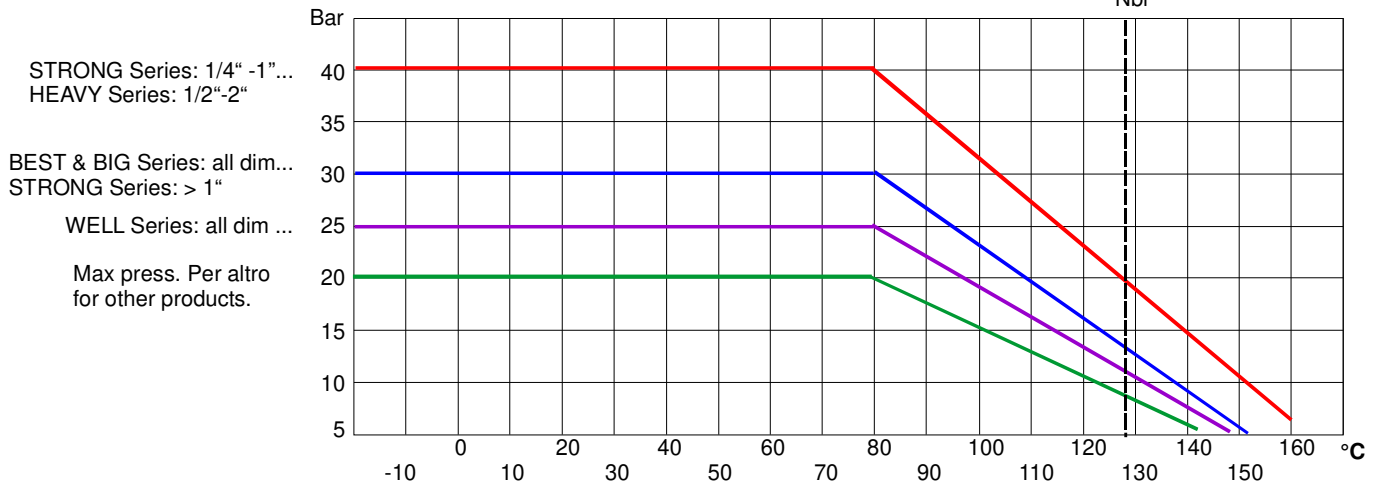

**DIAGRAMMA PERDITA DI CARICO VALVOLE A SFERA PASSAGGIO TOT.
PRESSURE DROP DIAGRAM: FULL FLOW BALL VALVES**

